

TECHN. DATEN (TECHNICAL DATA):

NENNDRUCK (NOMINAL PRESSURE) P_N

72 MPa (720 bar)

PRÜFDRUCK (TEST PRESSURE) P_P

84 MPa (840 bar)

GEWICHT (WEIGHT)

7,1 kg

HUB (STROKE)

120,0 mm

MAX. SPREIZKRAFT (MAX. SPREADING FORCE)

114,5 kN

INTEGRIERTE RÜCKZUGFEDER

(INTEGRATED TENSION SPRING)




608351 (SKS6/2)

KUPPLUNGSSTECKER

COUPLING MALE

360° DREHBAR (ROTATABLE)

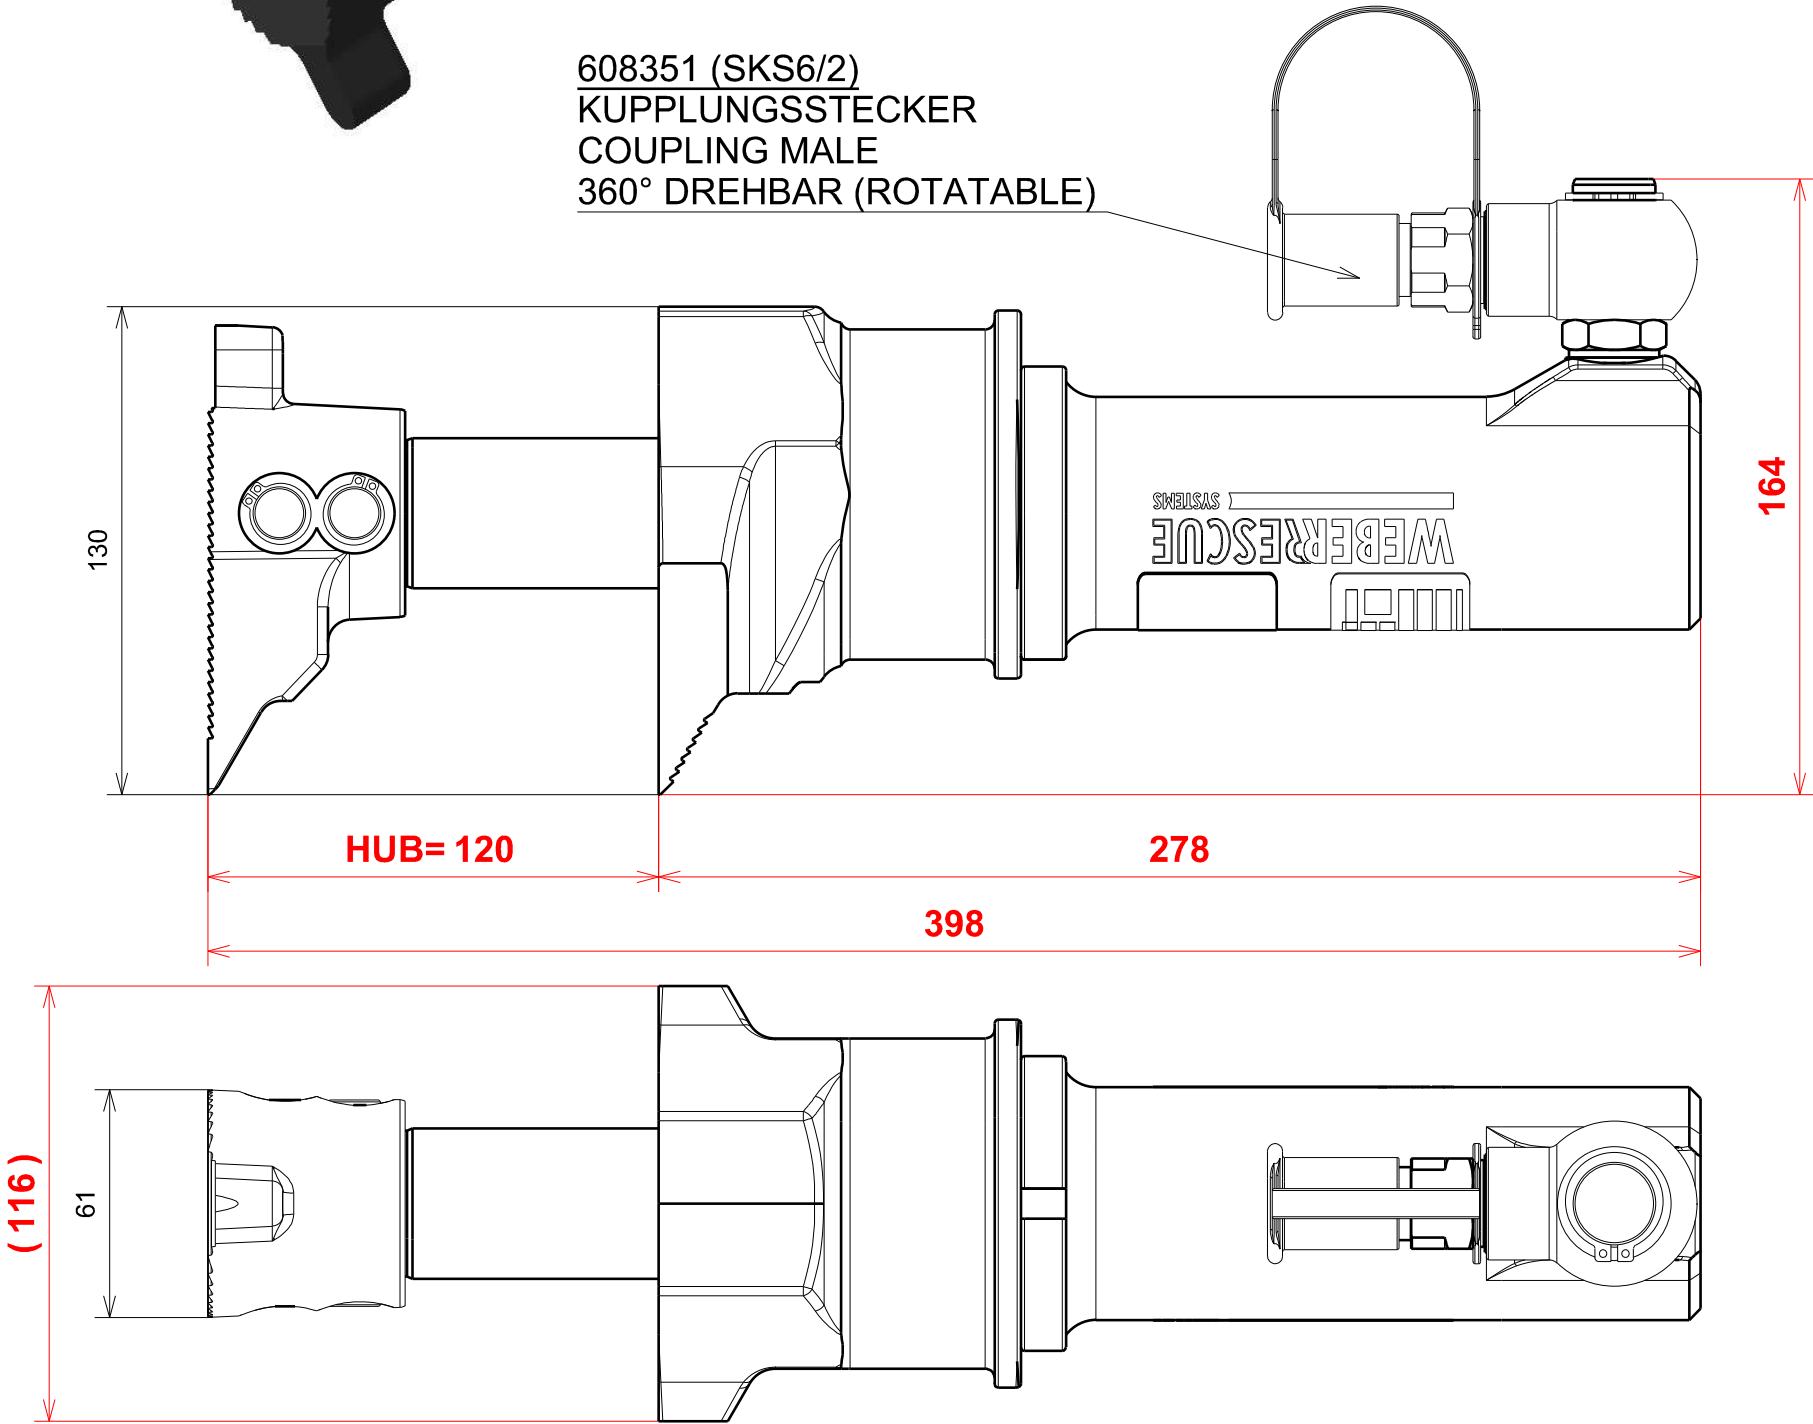

GEPR. JSC

CHECK.

GEZ. KST

DRAW.

DAT. 19.02.14

DAT.

KST

12.07.16

GEAEND. MODIF.

AEND.-DATUM

MOD.-DATE

160498

D

AEND.-NR. MOD.-NO.

REVISION REVISION